

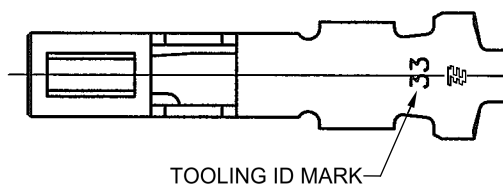
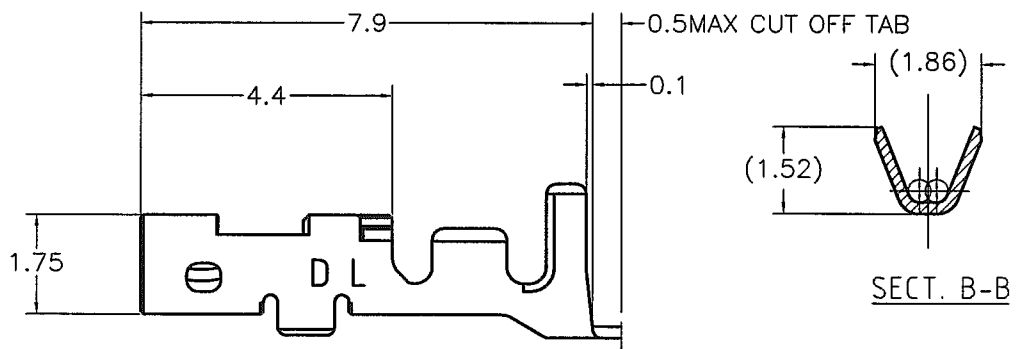


LOC	DIST	REVISIONS				DATE	DWN	APVD
J	—	P	LTR	DESCRIPTION				
		C		REVISED PER ECR-15-011723		08AUG15	Y.O	E.T

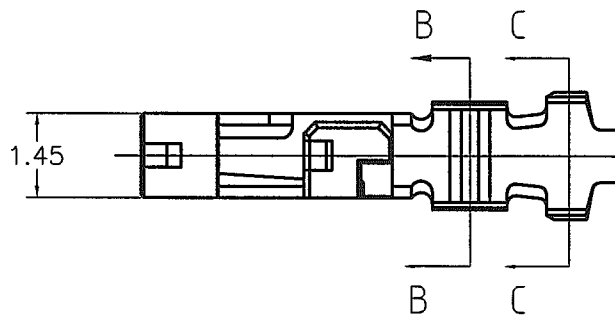


NOTE

1. GENERAL TOLERANCE : $\pm 0.3, \pm 3^\circ$
2. Application REC-HSG is applied to the product of 2.5mm PITCH or more of DYNAMIC D1000SERIES. 2.0mmPITCH cannot be used

1871744-1

PART No.

DIMENSIONS: 単位: 特 mm		DWN T.KUDO 1JUL2005	MATERIAL 材料 PRE-TIN COPPER ALLOY		FINISH 仕上
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		CHK D.MITSUGI 1JUL2005	 TE Connectivity		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		APVD D.MITSUGI 1JUL2005			
PRODUCT SPEC 製品規格 108-78298		NAME 名称 DYNAMIC D1000 SERIES REC CONTACT (L TYPE) TIN PLATE (L/P)			
APPLICATION SPEC 取付適用規格 114-5377		SIZE A4	CAGE CODE 00779	DRAWING NO 番号 C-1871744	RESTRICTED TO —
WEIGHT —		CUSTOMER DRAWING			
		SCALE 尺度 8:1		SHEET 1 OF 1	REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1871744-1](#)