

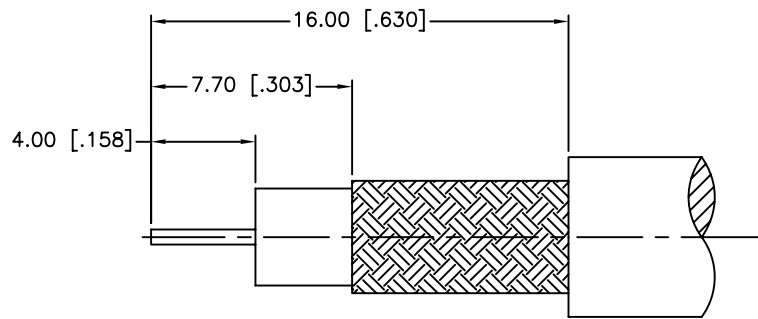
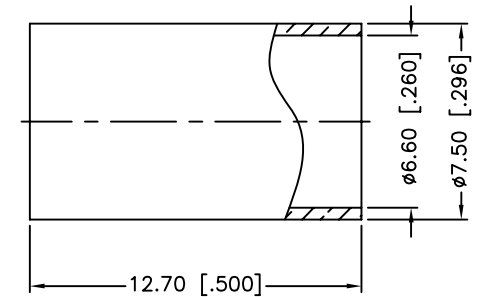


REV.	DATE	ECR NO.	DESCRIPTION
A	01/07/03	XXXXXX	UPDATE DRAWING FORMAT
B	12/03/09	2006	THE MATERIAL OF SHELL WAS CHANGED

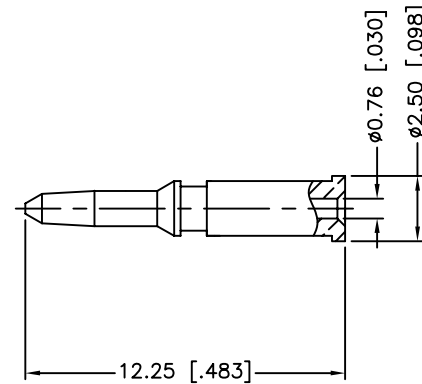

RECOMMENDED
CABLE STRIPPING DIM'S

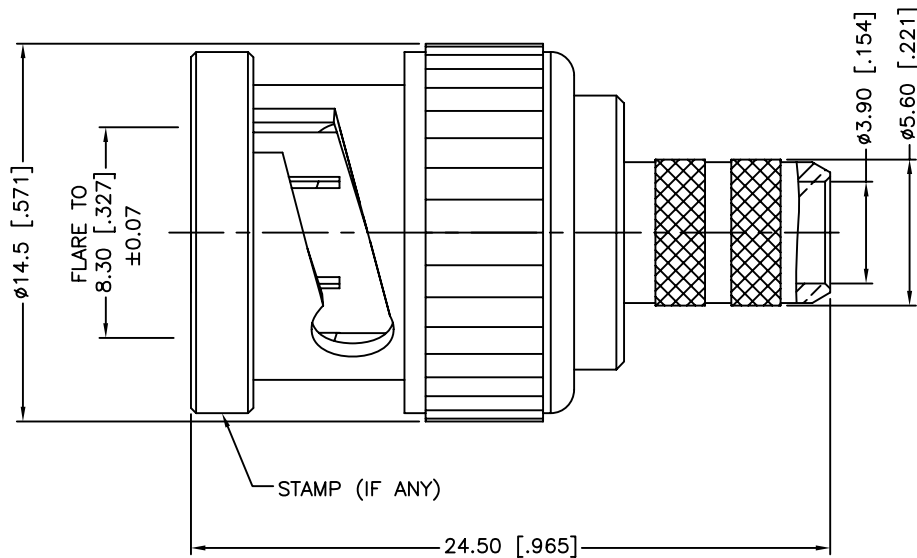

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

9	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex								
8	CONTACT PIN	BRASS	GOLD	1		DRAWN	M.ZHANG					12/03/09				
7	WASHER	BRASS	NICKEL	1		CHECKED										
6	SPRING	SK5	NICKEL	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	ISSUED		PART DESCRIPTION							
5	RETAINER RING	BRASS	NICKEL	1	SHEET		1 OF 1		BNC CRIMP PLUG (FOR RG-59/U CABLE – 75 ohm)							
4	GASKET	RUBBER	RED	1					PART NO.							
3	INSULATOR	DELIN	NATURAL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"				112123							
2	BODY	BRASS	NICKEL	1		CAD FILE	C:/CONNEX/112123.DWG		DWG. NO.	112123.DWG	REV.	B	SIZE	A	SCALE	NA
1	SHELL	ZINC DIECAST	NICKEL	1												
DESCRIPTION		MATERIAL	FINISH	QTY		DO NOT SCALE DRAWING										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112123](#)