


1 POINT OF MEASUREMENT FOR PLATING THICKNESS

2 THE TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

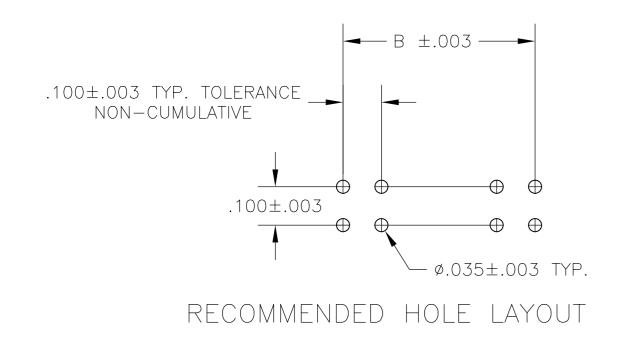

1471-9 (3/11)

В

А

| | 3.984 | 3.900 | 39 | 80 | 4-87 | 215-0 | |
|--|----------------------|--------|--------------------------|---|----------------|-----------------|----|
| | 3.884 | | 38 | 78 | 3- | -9 | |
| | 3.784 | 3.700 | 37 | 76 | 3- | -8 | |
| | 3.684 | 3.600 | 36 | 74 | 3- | -7 | |
| | 3.584 | 3.500 | 35 | 72 | 3- | -6 | |
| | 3.484 | 3.400 | 34 | 70 | 3- | -5 | |
| | 3.384 | 3.300 | 33 | 68 | 3- | -4 | |
| | 3.284 | 3.200 | 32 | 66 | 3- | -3 | |
| | 3.184 | 3.100 | 31 | 64 | 3- | -2 | |
| | 3.084 | 3.000 | 30 | 62 | 3- | — 1 | |
| | 2.984 | 2.900 | 29 | 60 | 3- | -0 | |
| | 2.884 | 2.800 | 28 | 58 | 2- | -9 | С |
| | 2.784 | 2.700 | 27 | 56 | 2- | -8 | |
| | 2.684 | 2.600 | 26 | 54 | 2- | -7 | |
| | 2.584 | 2.500 | 25 | 52 | 2- | -6 | |
| | 2.484 | 2.400 | 24 | 50 | 2- | -5 | |
| | 2.384 | 2.300 | 23 | 48 | 2- | -4 | |
| | 2.284 | 2.200 | 22 | 46 | 2- | -3 | |
| | 2.184 | 2.100 | 21 | 44 | 2- | -2 | |
| | 2.081 | 2.000 | 20 | 42 | 2 | - 1 | |
| | 1.984 | | 19 | 40 | 2- | -0 | |
| | 1.884 | | 18 | 38 | 1 — | -9 | |
| | 1.784 | | 17 | 36 | 1- | -8 | |
| | 1.684 | | 16 | 34 | 1 — | -7 | |
| | 1.584 | | 15 | 32 | 1 - | -6 | |
| | 1.484 | | 14 | 30 | 1- | -5 | 2 |
| | 1.384 | | 13 | 28 | 1 — | -4 | 51 |
| | 1.084 | | 10 | 22 | 1- | -3 | 87 |
| | .284 | .200 | 2 | 6 | 1 — | -2 | В |
| | .184 | .100 | 1 | 4 | 1- | - 1 | _ |
| | .084 | | | 2 | 1- | -0 | |
| | 1.284 | | 12 | 26 | | -9 | |
| | 1.184 | | 1 1 | 24 | | -8 | |
| | .984 | .900 | 9 | 20 | | -7 | |
| | .884 | .800 | 8 | 18 | | -6 | |
| | .784 | .700 | 7 | 16 | | -5 | |
| | .684 | .600 | 6 | 14 | | -4 | |
| | .584 | .500 | 5 | 12 | | -3 | |
| | .484 | .400 | 43 | 10 | 07 | $\frac{1}{215}$ | |
| | .384 | .300 | 0 | 8 | 07. | 215-1 | |
| | | | | NO | ASSE | IMBLY | |
| | C | B | A | OF | | ART | |
| | | | | POS | I NUN | 1BER | |
| THIS DRAWING IS A CONTROLLED DOCUMENT. | 3-15-85 | | | | | | |
| СНК | MAYER 5-21-85 | | TE | TE | Connectivit | .y | А |
| OTHERWISE SPECIFIED: APVD | ZOLA 5-21-85 NAME | | | | | | |
| 0 PLC ± - PRODU | LICKER ct spec | | SSEMBLY, | | | | |
| | - CATION SPEC | | JBLE ROW. RTICAL, .02 | | | | |
| 3 PLC ± .005 APPLIC 4 PLC ± - ANGLES ± | - SIZE | | RAWING NO | ~ | | RESTRICTED TO | |
| MATERIAL HOUSING-FLAME RETARDENT POSTS000030 GOLD ON WEIGHT | – A2 | 200779 | - 87215 | 5 | | — | |
| COLOR-BLACK THE CONTACT AREA, GOLD | TOMER DRAWING | | SCAL | _ESH | IEET 1 OF 1 | REV K | |
| | | | | I | | | |

SDDFSDF

D

| LOC | DIST | | | REVISIONS | | | |
|-----|------|---|-----|---|-----------|-----|------|
| AD | 39 | Ρ | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | К | PLASTIC MATERIAL SUPPLIER CHANGED FOR HOUSING | 07MAY2021 | SB | KJK |

2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{TE Connectivity:}}{\frac{1-87215-1}{2}}$