



Connectors > Terminal Blocks & Strips > Barrier Strips



Barrier Strip Style: **Tri-Barrier**  
Bottom Termination Type: **Printed Circuit Pin**  
Connector System: **Wire-to-Board**  
Number of Positions: **4**  
Centerline (Pitch): **8.26 mm [.325 in]**

Features

Product Type Features

|                                   |                            |
|-----------------------------------|----------------------------|
| Block Style                       | Open Bottom with Standoffs |
| Connector System                  | Wire-to-Board              |
| Connector & Contact Terminates To | Printed Circuit Board      |

Configuration Features

|                     |   |
|---------------------|---|
| Number of Levels    | 1 |
| Number of Positions | 4 |
| Number of Rows      | 1 |

Electrical Characteristics

|                   |       |
|-------------------|-------|
| Operating Voltage | 150 V |
|-------------------|-------|

Body Features

|                       |             |
|-----------------------|-------------|
| Primary Product Color | Black       |
| Product Orientation   | Vertical    |
| Barrier Strip Style   | Tri-Barrier |

Contact Features

|  |  |
|--|--|
|  |  |
|--|--|



|                                               |              |
|-----------------------------------------------|--------------|
| PCB Contact Termination Area Plating Material | Tin          |
| Contact Base Material                         | Copper Alloy |
| Contact Current Rating (Max)                  | 20 A         |

Termination Features

|                         |                     |
|-------------------------|---------------------|
| Bottom Termination Type | Printed Circuit Pin |
|-------------------------|---------------------|

Mechanical Attachment

|                         |                       |
|-------------------------|-----------------------|
| Screw Head Type         | Wire Clamp Combo Head |
| Mounting Insert         | Without               |
| Screw Plating Material  | Zinc                  |
| Screw Material          | Steel                 |
| Top Termination Type    | Wire Clamp Combo Head |
| Mounting Ears           | Without               |
| Mounting Options        | None                  |
| Thread Size             | 4-40                  |
| Connector Mounting Type | Board Mount           |

Housing Features

|                    |                   |
|--------------------|-------------------|
| Housing Material   | Polyamide         |
| Centerline (Pitch) | 8.26 mm [.325 in] |

Dimensions

|           |                        |
|-----------|------------------------|
|           | 1.36 in                |
| Wire Size | .3 – 3 mm <sup>2</sup> |

Usage Conditions

|                             |                         |
|-----------------------------|-------------------------|
| Operating Temperature Range | 0 – 105 °C [0 – 221 °F] |
|-----------------------------|-------------------------|

Operation/Application

|                     |       |
|---------------------|-------|
| Circuit Application | Power |
|---------------------|-------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |         |
|--------------------|---------|
| Packaging Quantity | 300     |
| Packaging Method   | Package |

Other

|  |  |
|--|--|
|  |  |
|--|--|



|                                  |                                                                                                                                                             |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Terminal Blocks & Strips Comment | Do not order screw and captive clamp in combination with other top hardware., Other options available upon request, consult our Product Information Center. |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2023 (233)<br>Candidate List Declared Against: JAN 2023 (233)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Wave solder capable to 265°C                                                                                                  |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>





Compatible Parts



Also in the Series | Buchanan 4 Series

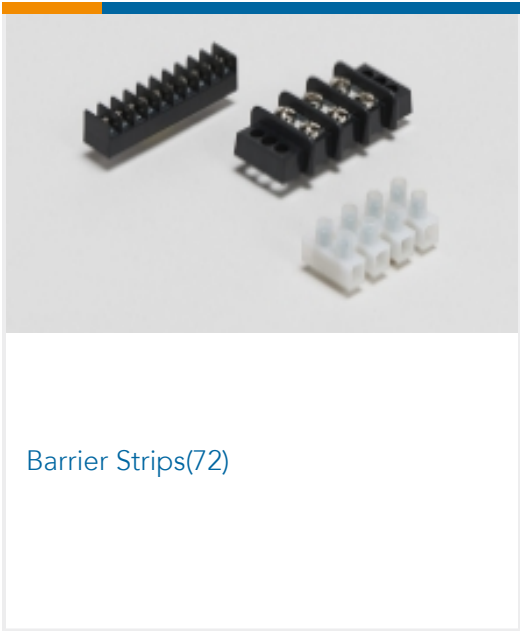

Customers Also Bought

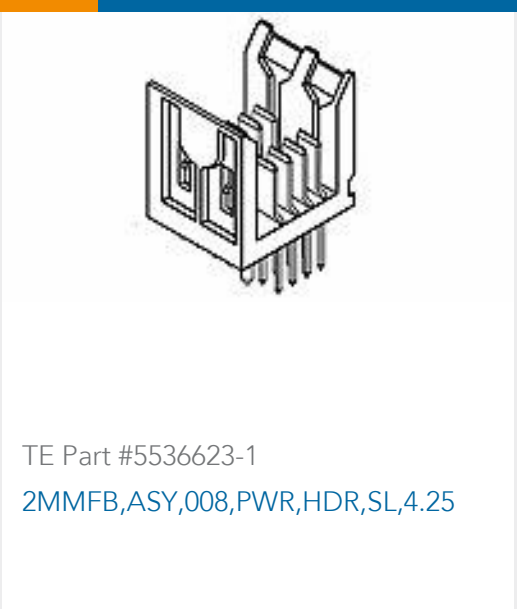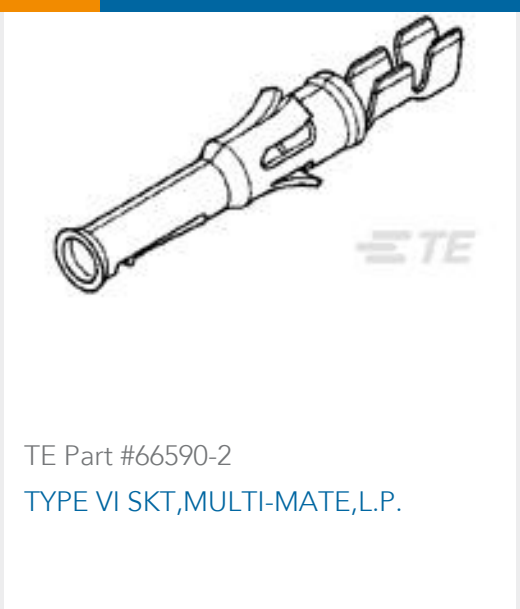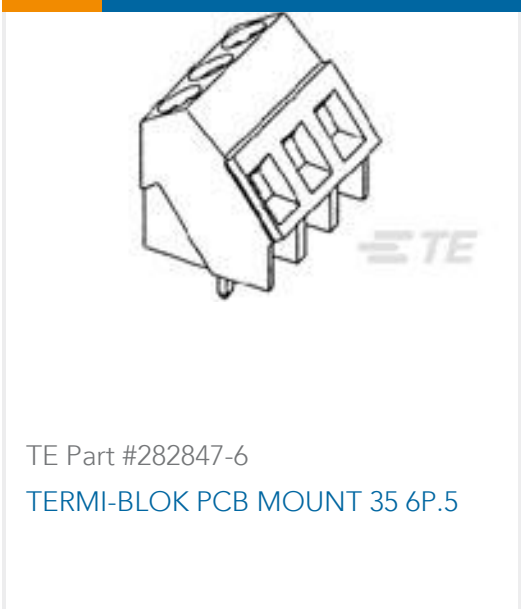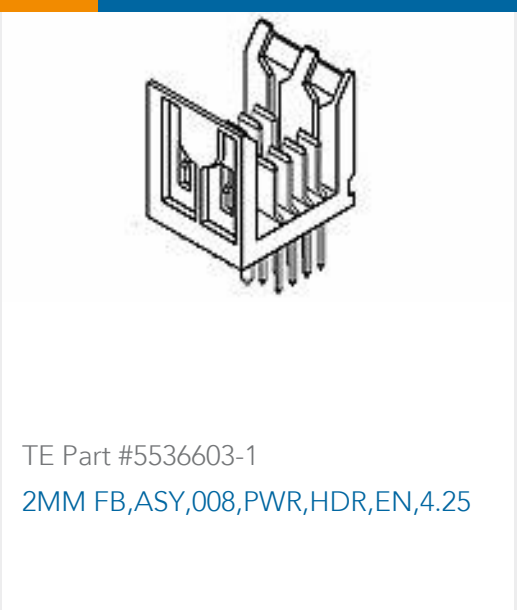

Documents

Product Drawings

4PCV-04-006=4PCV ASSEMBLY

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_6-1437648-7\_T.2d\_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG\\_CVM\\_CVM\\_6-1437648-7\\_T.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_6-1437648-7\\_T.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[BUCHANAN TERMINAL BLOCKS CATALOG - BARRIER STRIPS](#)

English

[1-1773458-2\\_BARRIER\\_STRIPS\\_QUICK\\_REFERENCE\\_GUIDE](#)

English