


PRODUCT NUMBER
71922-YYYYZLF

ROHS COMPATIBLE, SEE NOTE 10

= STANDARD HOUSING COLOR GREY (WITHOUT OPTIONAL LETTER)
B= OPTIONAL HOUSING COLOR BLACK
S= SPECIFIC CUSTOMER PLATING OPTION
HOUSING COLOR GREY

TOTAL NB OF POSITIONS, SEE SHEET 2
LATCHING
0= WITHOUT LATCH
1= STANDARD LATCH
2= LOW PROFILE LATCH

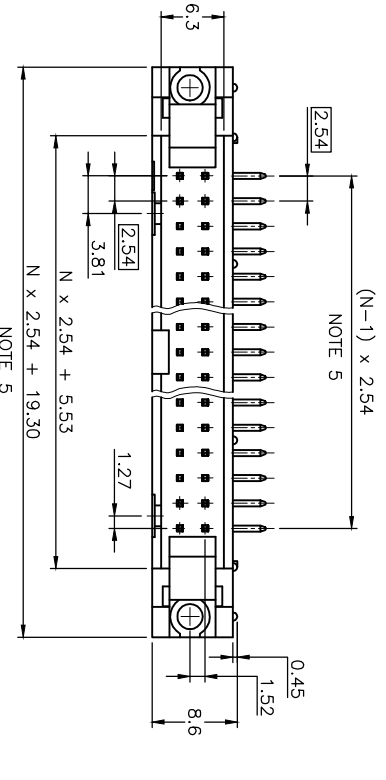

NOTE 5
N x 2.54 + 19.30

NOTE 6
N x 2.54 + 5.53

NOTES:

- 1 - HOUSING MAT'L : GLASS FILLED THERMOPLASTIC, UI94V-0
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - PRODUCT PACKAGED IN TUBES
- 4 - 40N MIN LATCH RETENTION FORCE AT FIRST EXTRACTION
- 5 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 6 - NO CENTRAL SLOT ON POSITIONS 6 & 8
- 7 - NO LEFT POLARIZATION ON POSITIONS 06, 08, 10, 14.
- 8 - NO GROOVE ON POSITIONS 06, 08, 10, 14, 30, 34
- 9 - 4.5mm SOLDER TAIL
ORDER 71922-4XX (WITH STANDARD LATCH ONLY)
ORDER 71922-5XX (WITH LOW PROFILE LATCH ONLY)
- 10 - ROHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING:


- "LF" MEANS THE PRODUCT IS LEAD-FREE.
2um MINIMUM MATTE TIN OVER 1.27um MINIMUM NICKEL UNDERPLATE.

b - MANUFACTURING PROCESS COMPATIBILITY



- THE HOUSING WILL WITHSTAND EXPOSURE TO 260C ±5C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.

c - LABELING:

- MEETS PACKAGING SPECS AS PER GS-14-920
d - LEGAL STATEMENT: SEE GS-47-0004.

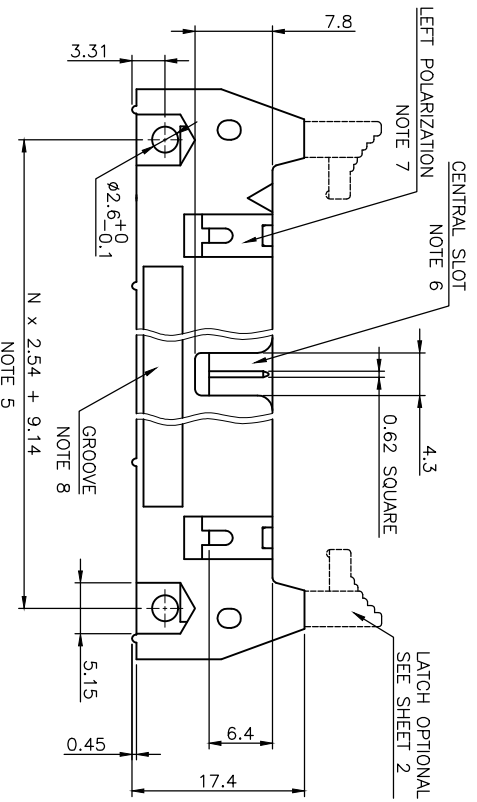

NOTE 5
N x 2.54 + 9.14

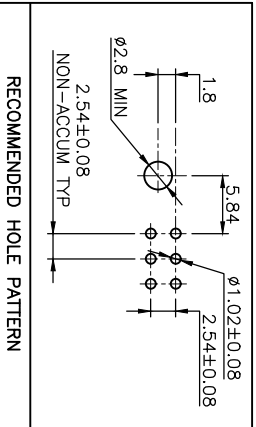

RECOMMENDED HOLE PATTERN

mat'l. code	SEE NOTES	surface	tolerance	projection	product family
Ufr	ecn no	ISO 1302	ISO 406	ISO 1101	QUICKIE
V	F10-0054	LMU 10.05.19	tolerances unless otherwise specified	XX ±0.3	SHR.EL.HEADER
W	B-16776	LMU 14.01.23	angles	XX ±0.13	RA DR TMT
X	B-18018	JCO 14.06.19	lineart	.XXX ±0.05	
Y	B-18236	LMU 14.07.08	DLE	01.01.24	
AA	B-19092	LWE 14.10.16	JMC	01.01.24	
AB	B-20349	BVE 15.03.02	JFN	01.01.24	
			JMC	01.01.24	

