


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—/#—						
			F2	REVISED PER ECR-20-100273	12AUG20	WH	DZ

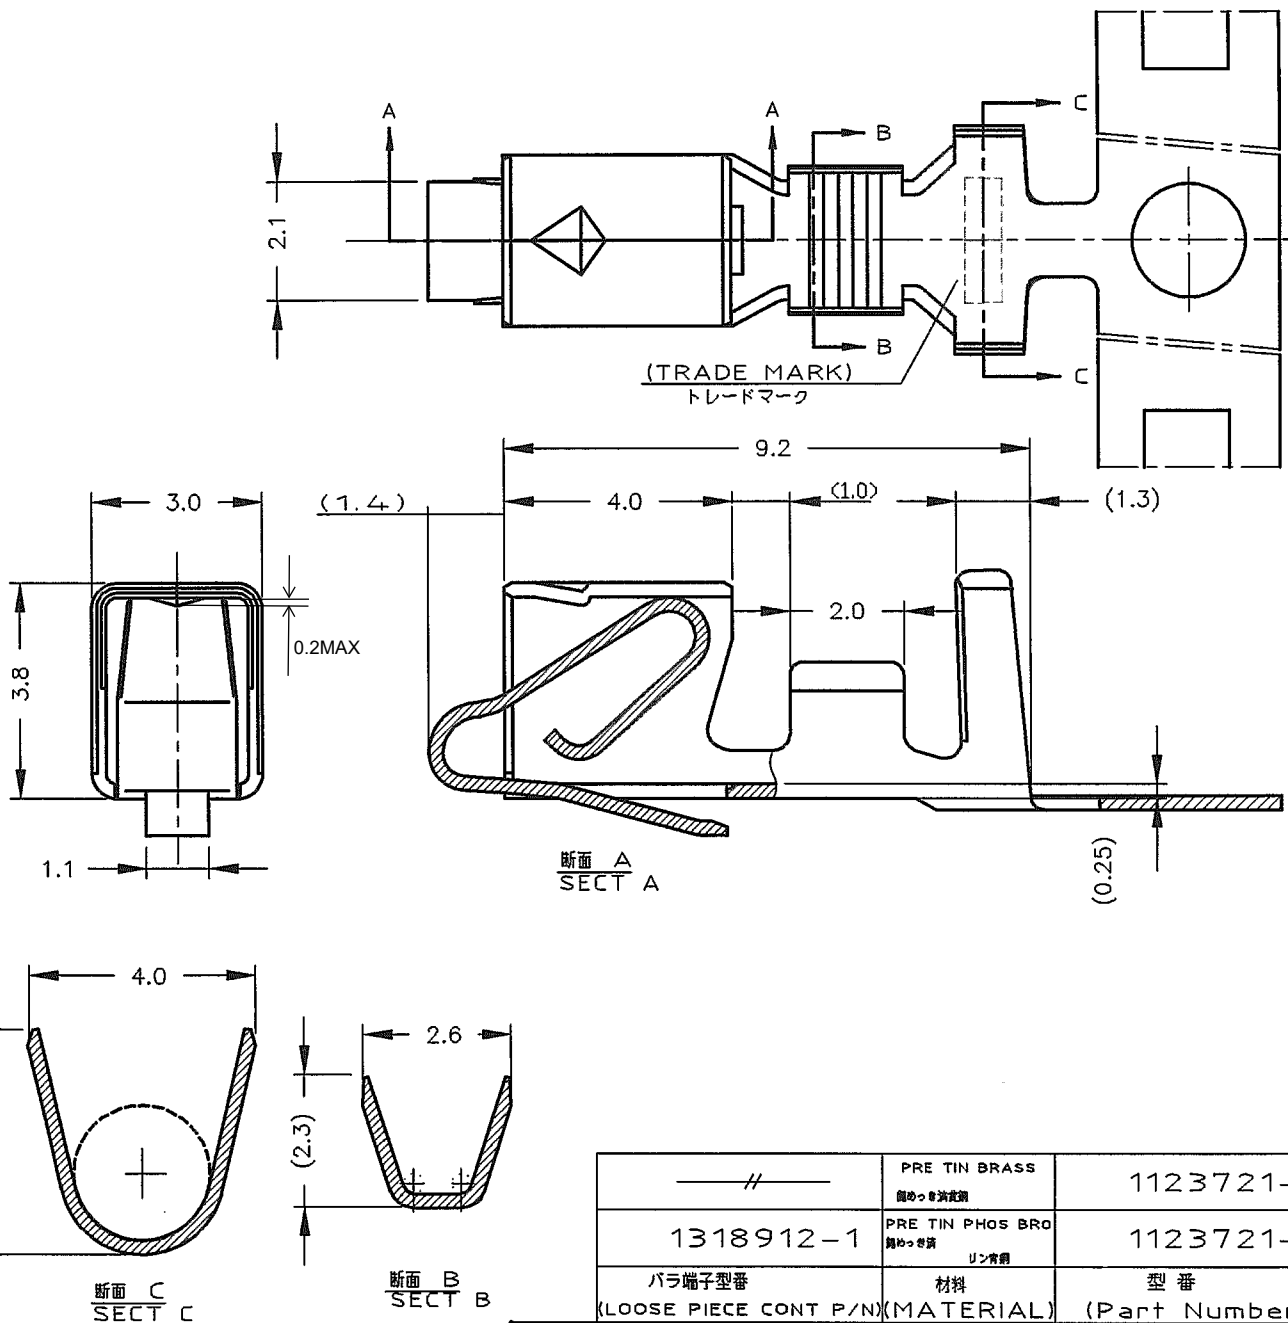

—/#—	PRE TIN BRASS 無めっき黄銅	1123721-2
1318912-1	PRE TIN PHOS BRO 無めっき黄銅リン青銅	1123721-1
バラ端子型番	材料	型番
(LOOSE PIECE CONT P/N)(MATERIAL) (Part Number)		

WIRE RANGE 組合電線断面積	INSULATION DIA 被覆外径
0.3~0.89mm ² (AWG#22~18)	φ1.7~3.0mm

DIMENSIONS: 単位: 概 mm	DWN	24 JUN '98	MATERIAL 表参照		FINISH
	N.YAMASAKI		(SEE LABEL)		仕上 —/#—
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 5± : ±0.3 >5 : ±0.4	CHK	24 JUN '98			
	M.SHINDO				
APPLICATION SPEC 取付適用規格	APVD	24 JUN '98			
	M.SHINDO				
WEIGHT	PRODUCT SPEC		NAME 名称 ECONOMY POWER(EP) CONN. REC CONT エコノミ〜パワー(EP) コネクタ リセコンタクト		
	製品規格	108-5609			
CUSTOMER DRAWING	APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A4 00779 番号 C=1123721		
	取付適用規格	114-5253			
	RESTRICTED TO		SCALE 尺度 —/#— SHEET 1 OF 1 REV F2		

参考図面

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1123721-1](#)