

## 500mA, 20V - 40V Schottky Barrier Diode

### FEATURES

- Low power loss, high current capability, low  $V_F$
- Surface mount device type
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_F$	500	mA
$V_{RRM}$	20 - 40	V
$I_{F5M}$	5.5	A
$T_{J\ MAX}$	125	°C
Package	SOD-123	
Configuration	Single Die	



### MECHANICAL DATA

- Case: SOD-123
- Molding compound meets UL 94 V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Polarity: Indicated by cathode band
- Weight: 10.0mg (approximately)



SOD-123



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)					
PARAMETER	SYMBOL	B0520LW	B0530W	B0540W	UNIT
Marking code on the device		SD	SE	SF	
Power Dissipation	$P_D$		410		mW
Repetitive peak reverse voltage	$V_{RRM}$	20	30	40	V
Reverse voltage, total rms value	$V_{R(\text{RMS})}$	14	21	28	V
Forward current	$I_F$		500		mA
Surge peak forward current, 8.3ms single half sine-wave superimposed on rated load	$I_{F5M}$		5.5		A
Junction temperature	$T_J$		- 55 to +125		°C
Storage temperature	$T_{STG}$		- 55 to +125		°C

**THERMAL PERFORMANCE**

PARAMETER	SYMBOL	TYP	UNIT
Junction-to-ambient thermal resistance	$R_{\Theta JA}$	244	°C/W

**ELECTRICAL SPECIFICATIONS (T<sub>A</sub> = 25°C unless otherwise noted)**

PARAMETER	CONDITIONS	SYMBOL	VALUE	UNIT
Reverse Breakdown Voltage (Minimum Value)	B0520LW $I_R = 250\mu A$	$V_{BR}$	20	V
	B0530W $I_R = 130\mu A$		30	V
	B0540W $I_R = 20\mu A$		40	V
Forward voltage <sup>(1)</sup> (Maximum Value)	B0520LW $I_F = 100mA$	$V_F$	0.300	V
	B0530W $I_F = 100mA$		0.375	V
	B0540W $I_F = 100mA$		-	V
	B0520LW $I_F = 500mA$		0.385	V
	B0530W $I_F = 500mA$	$V_F$	0.430	V
	B0540W $I_F = 500mA$		0.510	V
	B0520LW $I_F = 1000mA$		-	V
	B0530W $I_F = 1000mA$		-	V
	B0540W $I_F = 1000mA$		0.620	V
Reverse current @ rated V <sub>R</sub> <sup>(2)</sup> (Maximum Value)	B0520LW $V_R = 10V$	$I_R$	75	$\mu A$
	B0530W $V_R = 10V$		-	$\mu A$
	B0540W $V_R = 10V$		-	$\mu A$
	B0520LW $V_R = 15V$	$I_R$	-	$\mu A$
	B0530W $V_R = 15V$		20	$\mu A$
	B0540W $V_R = 15V$		-	$\mu A$
	B0520LW $V_R = 20V$	$I_R$	250	$\mu A$
	B0530W $V_R = 20V$		-	$\mu A$
	B0540W $V_R = 20V$		10	$\mu A$
	B0520LW $V_R = 30V$	$I_R$	-	$\mu A$
	B0530W $V_R = 30V$		130	$\mu A$
	B0540W $V_R = 30V$		-	$\mu A$
	B0520LW $V_R = 40V$	$I_R$	-	$\mu A$
	B0530W $V_R = 40V$		-	$\mu A$
	B0540W $V_R = 40V$		20	$\mu A$
Junction capacitance	1MHz, $V_R = 0V$	$C_J$	170	pF

 **ORDERING INFORMATION**

ORDERING CODE <sup>(1)</sup>	PACKAGE	PACKING
B05x RHG	SOD-123	3,000 / 7" Tape & Reel


**Notes:**

1. "x" defines voltage from 20V(B0520LW) to 40V(B0540W)


## CHARACTERISTICS CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Characteristics**

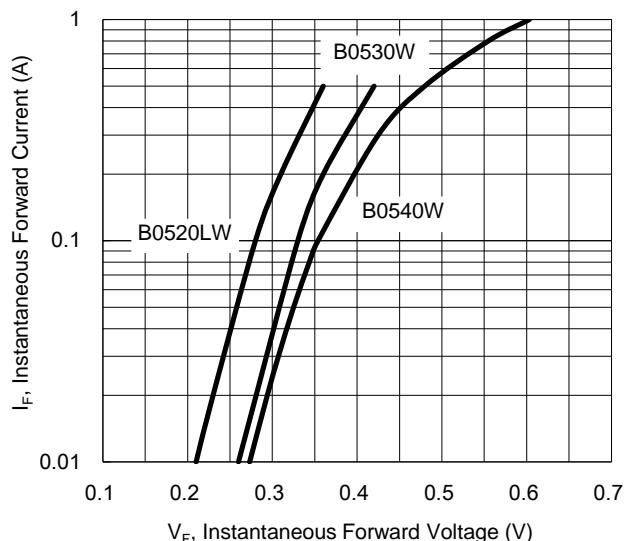


**Fig.2 Forward Current Derating Curve**

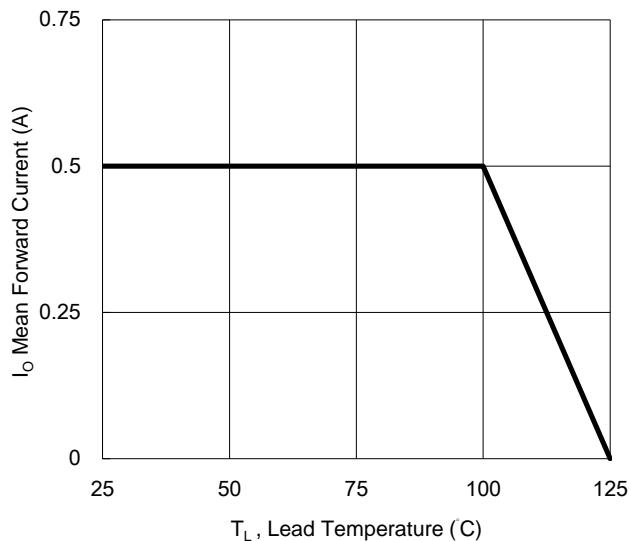


**Fig.3 Power Derating Curve**

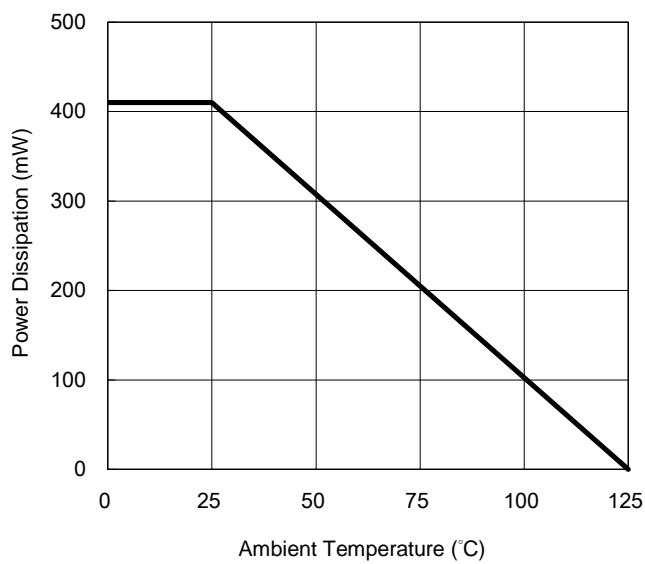


**Fig.4 Typical Capacitance vs. Reverse Voltage**

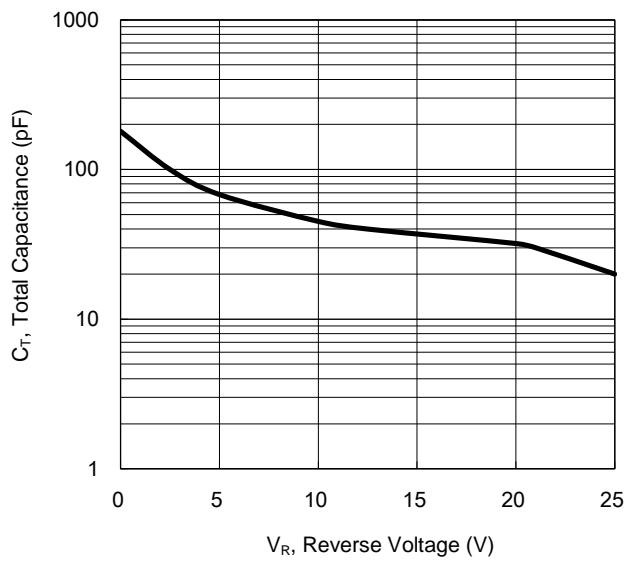

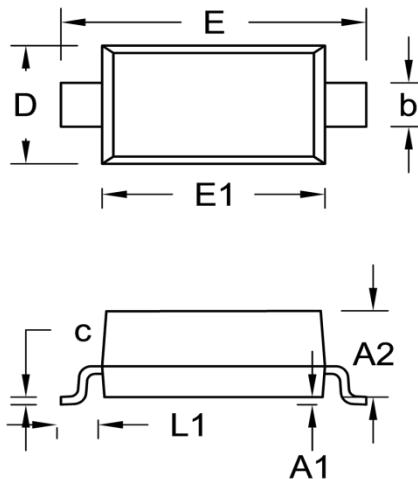**PACKAGE OUTLINE DIMENSIONS**
**SOD-123**


DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A1	-	0.10	-	0.004
A2	0.95	1.30	0.037	0.051
b	0.45	0.70	0.018	0.028
c	0.05	0.15	0.002	0.006
D	1.40	1.70	0.055	0.067
E	3.55	3.85	0.140	0.152
E1	2.55	2.85	0.100	0.112
L1	0.50 (REF)		0.020 (REF)	

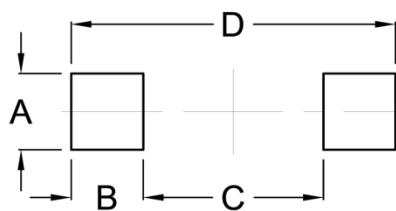**SUGGESTED PAD LAYOUT**


Symbol	Unit (mm)	Unit (inch)
A	0.95	0.037
B	0.90	0.035
C	2.25	0.089
D	4.05	0.159

**Notes:**

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.