

D

C

B


A

D




C

B


A

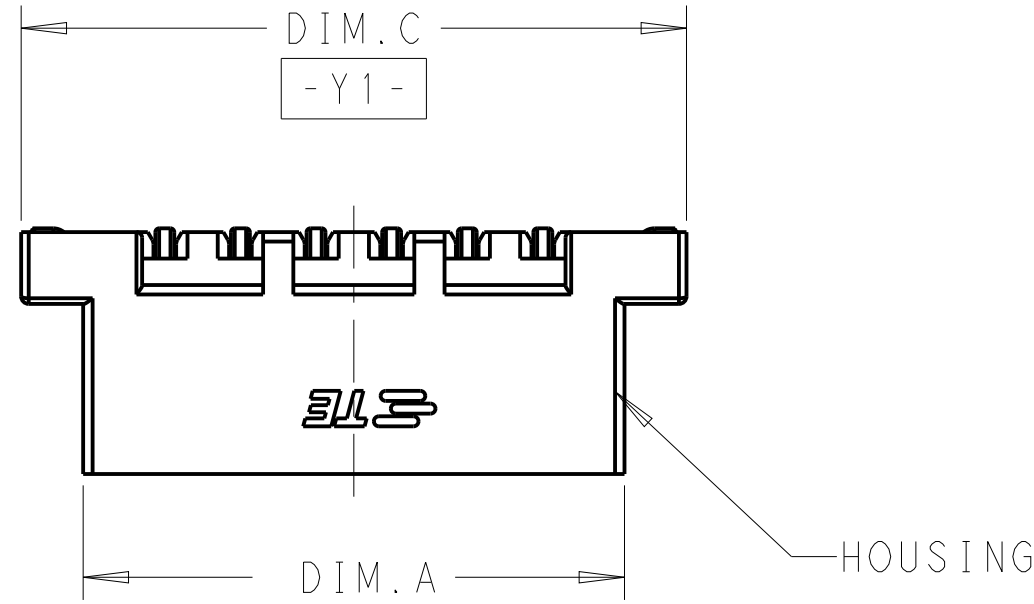

- 1 MATERIAL: CONTACT - BRASS
METAL PEG - BRASS
HOUSING - UL94V-0 RATED HIGH TEMP NYLON;
- 2 PLATING: CONTACT - 2.0um MINIMUM TIN OVER 1.27um MINIMUM NICKEL
LEAD FREE PLATING;
METAL PEG - 2.0um MINIMUM TIN OVER 1.27um MINIMUM NICKEL.
LEAD FREE PLATING.
3. PRODUCT COMPLY WITH IEC60335-1 SECTION30(GWT)GLOW WIRE REQUIREMENTS.
- 4 OBSOLETE.

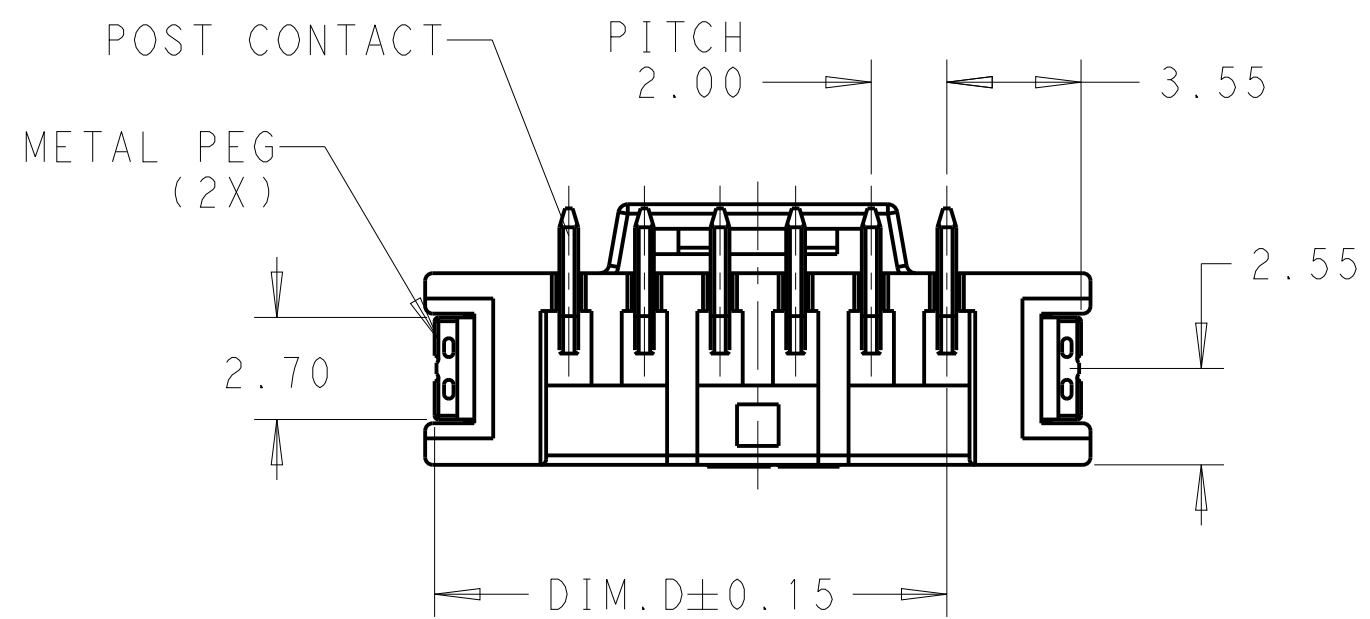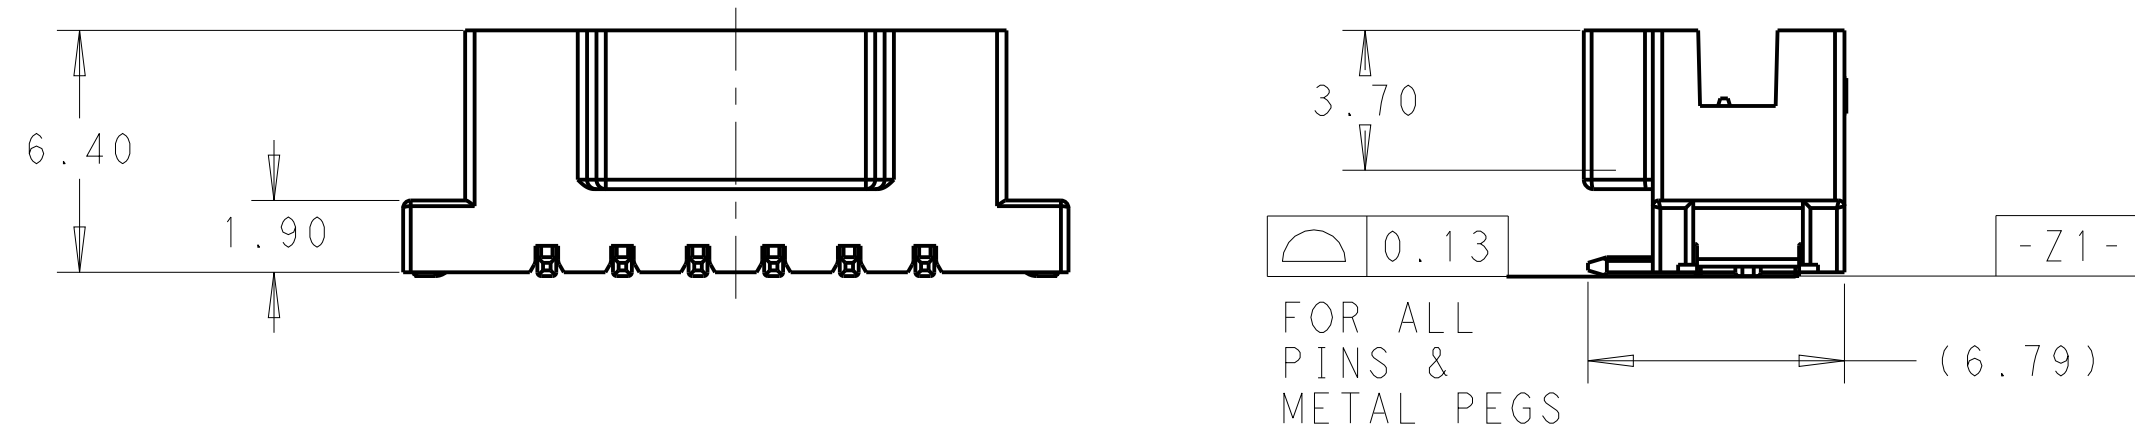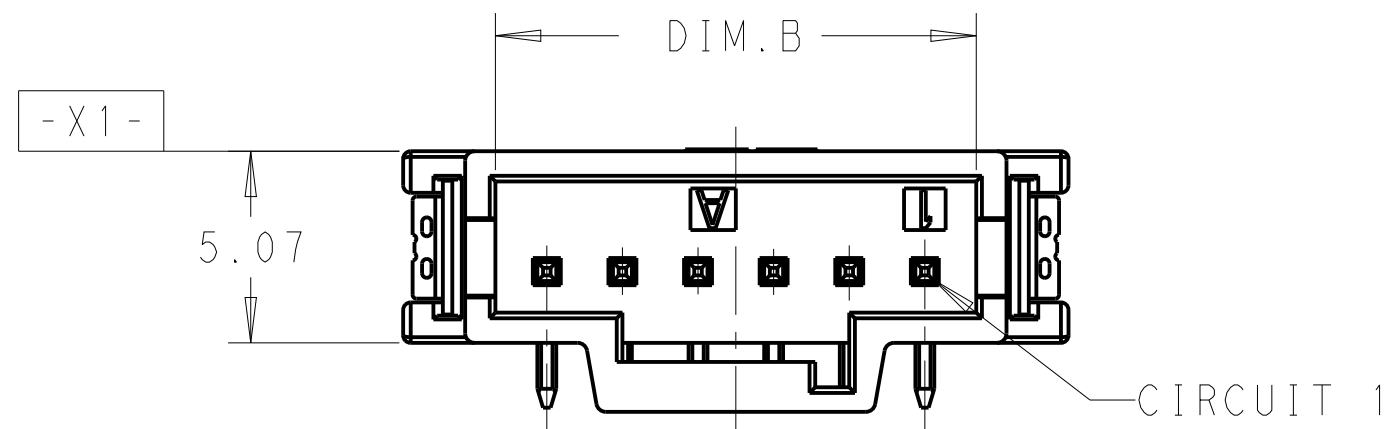

KEY A SHOWN FOR 6 POS.

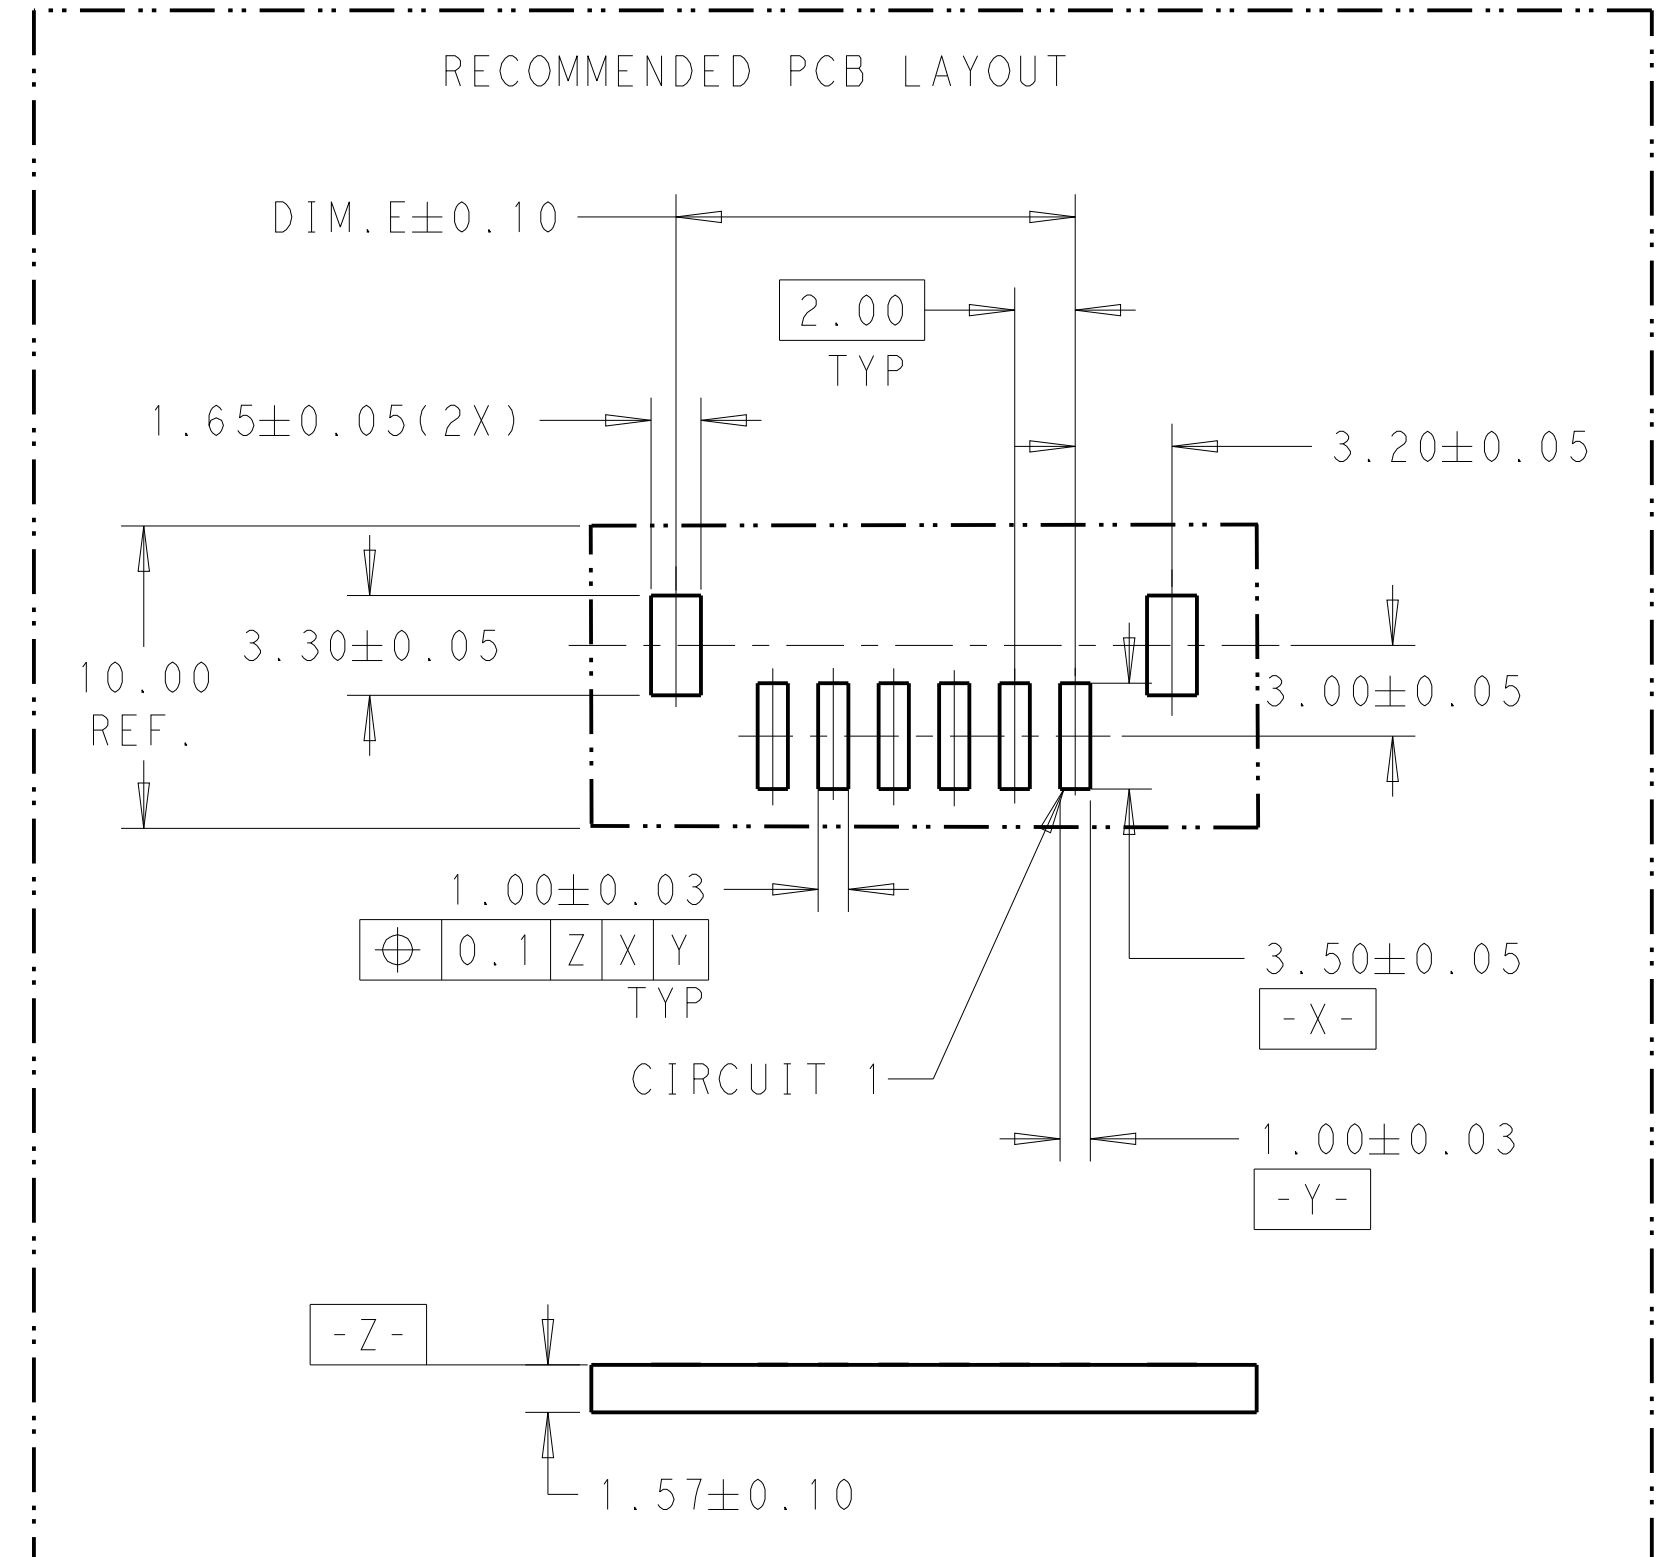

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN CANDY, X 30AUG2017	TE Connectivity	
		CHK DANIEL, Z 4SEP2017		
DIMENSIONS:		APVD DANIEL, Z 4SEP2017	NAME HEADER ASSEMBLY, VERTICAL, SG12.0mm SMT TYPE	
mm		PRODUCT SPEC 108-106266	SIZE A200779	
		APPLICATION SPEC 114-106266	CAGE CODE C-2232829	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT -	DRAWING NO -	
0 PLC ± 1 PLC ± 2 PLC ±0.15 3 PLC ± 4 PLC ±		FINISH 2	RESTRICTED TO	
ANGLES ±3°		finish_spec_2	SCALE 1:1	
MATERIAL 1		CUSTOMER DRAWING	SHEET 1 OF 2	
			REV A1	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-		

KEYING ID

KEY A

SLOT AREA FOR KEYING

KEY B

2-2232979-0	21.20	21.55	25.60	20.72	22.32	10	A	NATURAL	2-2232829-0
1-2232979-9	19.20	19.55	23.60	18.72	20.32	9			1-2232829-9
1-2232979-8	17.20	17.55	21.60	16.72	18.32	8			1-2232829-8
1-2232979-7	15.20	15.55	19.60	14.72	16.32	7			1-2232829-7
1-2232979-6	13.20	13.55	17.60	12.72	14.32	6			1-2232829-6
1-2232979-5	11.20	11.55	15.60	10.72	12.32	5			1-2232829-5
1-2232979-4	9.20	9.55	13.60	8.72	10.32	4			1-2232829-4
1-2232979-3	7.20	7.55	11.60	6.72	8.32	3			1-2232829-3
1-2232979-2	5.20	5.55	9.60	4.72	6.32	2			1-2232829-2
MATING PARTS	DIM.E	DIM.D	DIM.C	DIM.B	DIM.A	POS.	KEYING	COLOR	ASSEMBLY PART NO.

3-2232979-0	21.20	21.55	25.60	20.72	22.32	10	B	NATURAL	3-2232829-0	△4
2-2232979-9	19.20	19.55	23.60	18.72	20.32	9			2-2232829-9	△4
2-2232979-8	17.20	17.55	21.60	16.72	18.32	8			2-2232829-8	△4
2-2232979-7	15.20	15.55	19.60	14.72	16.32	7			2-2232829-7	△4
2-2232979-6	13.20	13.55	17.60	12.72	14.32	6			2-2232829-6	△4
2-2232979-5	11.20	11.55	15.60	10.72	12.32	5			2-2232829-5	△4
2-2232979-4	9.20	9.55	13.60	8.72	10.32	4			2-2232829-4	△4
2-2232979-3	7.20	7.55	11.60	6.72	8.32	3			2-2232829-3	△4
2-2232979-2	5.20	5.55	9.60	4.72	6.32	2			2-2232829-2	△4
MATING PARTS	DIM.E	DIM.D	DIM.C	DIM.B	DIM.A	POS.	KEYING	COLOR	ASSEMBLY PART NO.	

4-2232979-0	21.20	21.55	25.60	20.72	22.32	10	A	BLACK	4-2232829-0	△4
3-2232979-9	19.20	19.55	23.60	18.72	20.32	9			3-2232829-9	△4
3-2232979-8	17.20	17.55	21.60	16.72	18.32	8			3-2232829-8	△4
3-2232979-7	15.20	15.55	19.60	14.72	16.32	7			3-2232829-7	△4
3-2232979-6	13.20	13.55	17.60	12.72	14.32	6			3-2232829-6	△4
3-2232979-5	11.20	11.55	15.60	10.72	12.32	5			3-2232829-5	△4
3-2232979-4	9.20	9.55	13.60	8.72	10.32	4			3-2232829-4	△4
3-2232979-3	7.20	7.55	11.60	6.72	8.32	3			3-2232829-3	△4
3-2232979-2	5.20	5.55	9.60	4.72	6.32	2			3-2232829-2	△4
MATING PARTS	DIM.E	DIM.D	DIM.C	DIM.B	DIM.A	POS.	KEYING	COLOR	ASSEMBLY PART NO.	

5-2232979-0	21.20	21.55	25.60	20.72	22.32	10	B	BLACK	5-2232829-0	
4-2232979-9	19.20	19.55	23.60	18.72	20.32	9			4-2232829-9	
4-2232979-8	17.20	17.55	21.60	16.72	18.32	8			4-2232829-8	
4-2232979-7	15.20	15.55	19.60	14.72	16.32	7			4-2232829-7	
4-2232979-6	13.20	13.55	17.60	12.72	14.32	6			4-2232829-6	
4-2232979-5	11.20	11.55	15.60	10.72	12.32	5			4-2232829-5	
4-2232979-4	9.20	9.55	13.60	8.72	10.32	4			4-2232829-4	
4-2232979-3	7.20	7.55	11.60	6.72	8.32	3			4-2232829-3	
4-2232979-2	5.20	5.55	9.60	4.72	6.32	2			4-2232829-2	
MATING PARTS	DIM.E	DIM.D	DIM.C	DIM.B	DIM.A	POS.	KEYING	COLOR	ASSEMBLY PART NO.	

KEY A SHOWN FOR 2 THRU 10 POS.

2POS.

3POS.

4POS.

5POS.

6POS.

7POS.

8POS.

9POS.

10POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±0.15

3 PLC ±

4 PLC ±

ANGLES ±3°

FINISH

finish_spec_2

DWN CANDY, X 30AUG2017

CHK DANIEL, Z 4SEP2017

APVD DANIEL, Z 4SEP2017

PRODUCT SPEC 108-106266

APPLICATION SPEC 114-106266

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME HEADER ASSEMBLY, VERTICAL, SGI 2.0mm SMT TYPE

SIZE A2

CAGE CODE 00779

DRAWING NO C-2232829

RESTRICTED TO

SCALE 4:1

SHEET 2 OF 2

REV A1

1471-9 (3/13)