
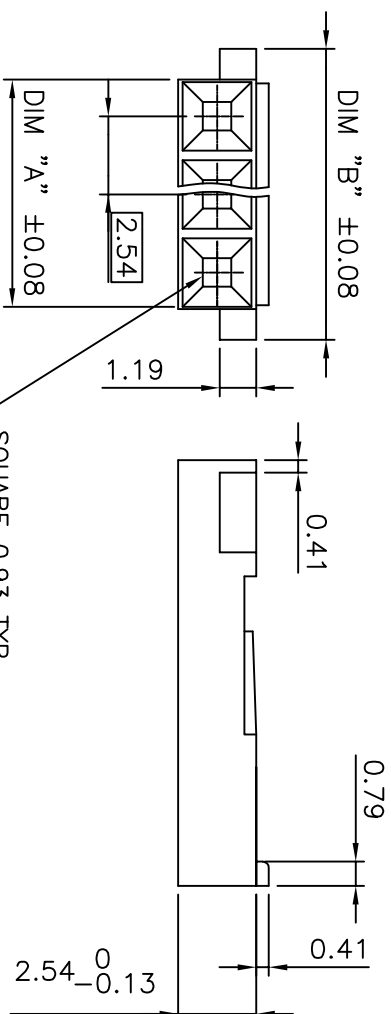


PRODUCT NUMBER	No. OF POS.	DIM "A"	DIM "B"
67954-001LF	1x02	4.93	6.93
67954-002LF	1x03	7.47	9.47
67954-003LF	1x04	10.01	12.01

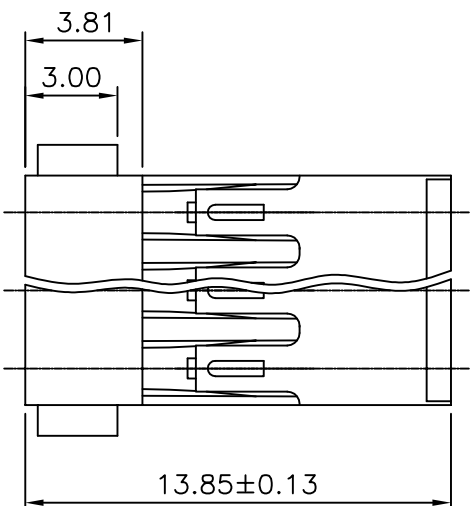

NOTES:

1. MOLDING MATERIAL : POLYAMID (PA 66), COLOR BLACK
25% GLASS FILLED, UL 94 V0
2. STANDARD PACKAGING IN POLYBAGS
3. TERMINALS MUST BE CRIMPED PROPERLY FOR SATISFACTORY LATCHING :
 - FOR CRIMPING INSTRUCTIONS, SEE TA-75
 - FOR TERMINAL APPLICATION SEE TA-531.PRODUCT SPECIFICATION: BUS-12-067.
4. THIS HOUSING IS INTENDED FOR USE WITH MINI PV TERMINAL WITH 22-36 GAUGE WIRE
5. PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
6. THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

mat'l. code		surface		tolerance	projection		product family	
SEE NOTES		ISO 1302	ISO 406	ISO 1001			BERCONN	
litr	ecn	no	dr	date	tolerances unless otherwise specified		title	
H	K07-0533	HTB		07.08.16	angles	$x \pm 0.3$	MINI LATCH SR	
J	F11-0098	LMU		11.09.05	linear	$.xx \pm 0.13$	POLARIZED HSG 2.54mm	
						$.xxx \pm 0.05$	dwg no	
						scale 5:1	sheet 1 of 1	
			dr				size	
			enqr		LMULIN	11.05.19	67954	
			chr				CUSTOMER	
					apdd	LMU	Drawing	
sheet		revision						
index		sheet						